


CAT 6A Slim patch cord U/FTP, class EA

The CABLEDOC slim patch cable impresses with its slim design and with a height of 2.2mm is ideal for installation e.g. behind moldings or under a carpet. The molded grommet has a slim design and thus simplifies the plugging process in confined spaces.

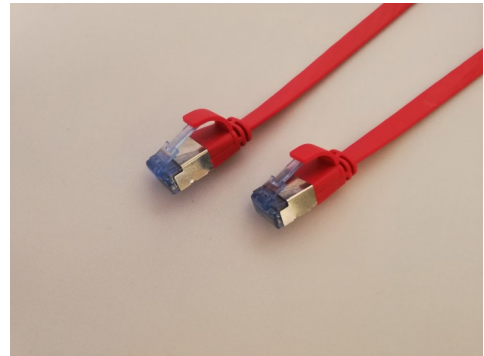

Features

- suitable for 10G Ethernet applications
- gold-plated contacts
- Ideal for cramped conditions

Standards

- RoHS 2.0 & REACH
- UL & LSZH
- IEC 60603-7-51

Specification

category	CAT 6A (TIA)	mating cycles	≥750
connector type port 1, 2	RJ45 8(8)	bending radius	10 mm
connector	RJ45 short plug	shield contact	shielded
contact	Gold-plated	cable construction	4x2
Pin assignment	1:1	AWG/strands per core	32/7
assignment	TIA/EIA 568B	conductor	copper
design	shielded	Silicone-free	yes
bend relief	angespritzt	jacket	LSZH
detent lever protection	Yes	outer diameter	7,0x2,2 mm
type	U/FTP	operating temperature	-20 °C ~ +55°C



COPPER SYSTEM

CAT 6A Slim patch cord U/FTP, class EA

Order number: SLIMS6A-(A)-(B)

	0.25m	0.5m	1m	1.5m	2m	3m	5m	7.5m	15m	B
Grey (GY)	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Black (BK)	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Blue (BU)	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Green (GR)	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Red (RD)	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Yellow (YE)	✓	✓	✓	✓	✓	✓	✓	✓	✓	
White (WH)	✓	✓	✓	✓	✓	✓	✓	✓	✓	
A										

e.g.: SLIMS6A-GY-3m